

Bazaar – php example code – part 7 – limiting user access and diferent page content display

Article deeper focus on mechanism how to use session variables created for loged in user for diferentiating page display. This mechanism relays on login features described in article part 6. Together make reusable solution for another projects with need in restricting access and diferent page content display for diferent categories of users.

Diferent content display – how to?

In many cases is important to display content of the page diferently for diferent types of users. Page for anonymous user will not display ability for editing user profiles or only loged in user can sell or buy listed items.

First part of all pages restricting access to them contains initialization session function call and reading info from session. If session is not set up, then look at data stored in cookies. If cookies contain valid information about loged in users, then session inforation is per page restored by their content. If not, page display content as for anonymous user.

This code looks like this

```

require_once('appvars.php'); // including variables for datab
ase
    // two variables for message and styling of the message wit
h bootstrap
    session_start(); // start the session – must be added on a
ll pages for session variable accessing
    // solution using SESSIONS with COOKIES for longer (30days
) login persistency

    if(!isset($_SESSION['users_id'])) { // if session is no mo
re active
        if(isset($_COOKIE['users_id']) && isset($_COOKIE['user
name'])) { // but cookie is set then renew session variables a
long them
            $_SESSION['users_id'] = $_COOKIE['users_id'];
            $_SESSION['username'] = $_COOKIE['username'];
            $_SESSION['user_role'] = $_COOKIE['user_role']; //
added for role
        }
    }
}

```

Diferent page content display

For diferent page display, we request for existence one fo session variable. If present, user is logged in, if not alternative part of page code must be shown.

```

<!-- ***** ->
<!-- HTML part available after succesfull login ->
<!-- ***** ->

```

```

<?php if(isset($_SESSION['users_id']) ) { //if user is logged w
ith users_id then editprofile form is available?>

```

... part of page code shown if user logged in ...

```

<!-- ***** ->
<!-- HTML part displayed for unlogged user ->

```

```

<!-- ***** ->
<?php } else { // else if user is not logged then form will not
be displayed?>

    <br>
    
    <br>
    <h4>For listening items for sell you must be logged in
<a class="navbar-brand" href="login.php"> here. </a></h4>
    <br>

<?php } ?>

```

Main page menu variable content display

Main menu is another example of part of adaptive display relaying on category of logged in user.

Next code display way how to display their content.

```

<body>
    <nav class="navbar navbar-default">
        <div class="container">
            <div class="navbar-header">
                <?php // generate menu if user is logged in or not
                // old solution with cookies if(isset($_COOKIE['username'])) { // logged in user
                if(isset($_SESSION['username'])) { // logged in user
                    echo ',<a class="navbar-brand" href="index.php">Bazaar – best items for a best prices!
                    </a>';
                    echo ',<a class="navbar-brand" href="editprofile.php"> Edit profile </a>';

```


```

        echo ,<a class="navbar-
brand" href="logout.php"> Logout , .$_SESSION[,username'] .'</
a>';
        if(isset($_SESSION[,user_role'])=='admin') {
            echo ,<a class="navbar-
brand" href="admin.php"> Manage your page </a>';
        };
        require_once(,sell_icon.php'); // graphic menu
item for selling your items – we focus on this two items in
next articles from tihis series
        require_once(,cart_icon.php'); // small cart ic
on in menu
    } else { // visitor without login
        echo ,<a class="navbar-
brand" href="login.php"> Log In </a>';
        echo ,<a class="navbar-
brand" href="signup.php"> Sign Up for better membership! </a>';
        ;

        echo ,<a class="navbar-
brand" href="index.php">Bazaar – best items for a best prices!
</a>';
    }
    ?>
</div>
</div>
</nav>


```

Different display of content shows following pictures on example of admin page.

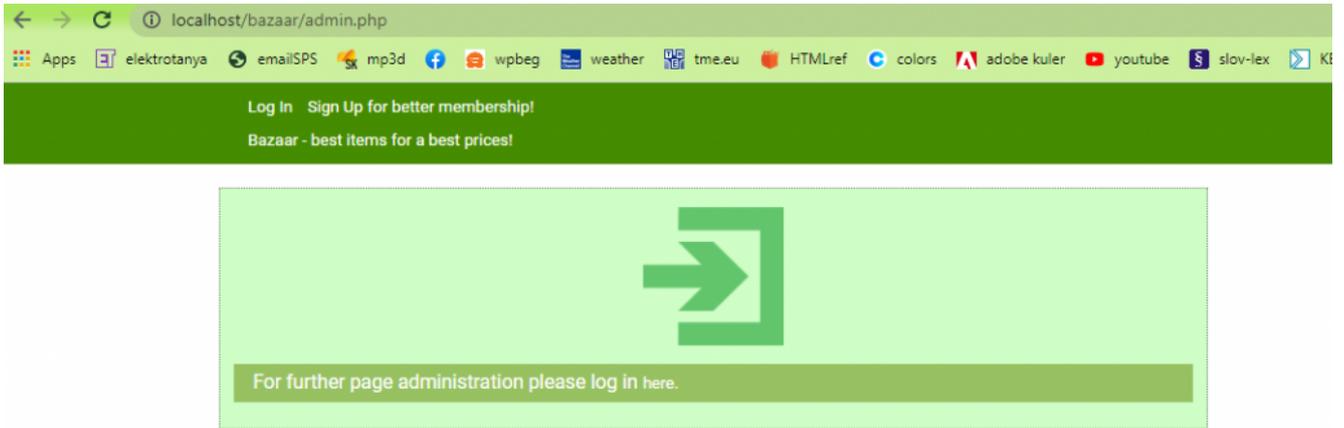

Visit us on CDesigner.eu

Display of admin page of unlogged user

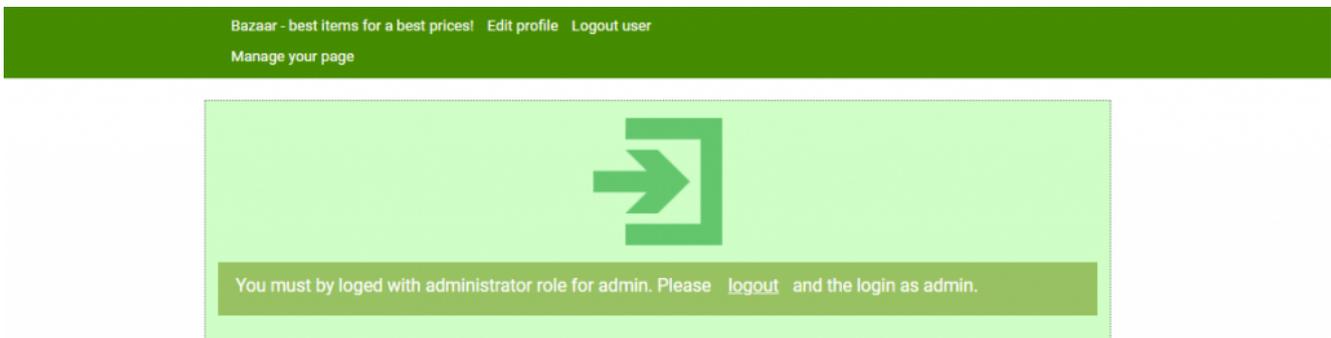

Visit us on CDesigner.eu

Display of admin page for user with low priviledges – relogin as admin requested.



Logged in as admin

Conclusions and further thoughts

We described ways how to display different content of the pages for different categories of users. Or mechanism use existence of session variables of logged user for making decision of which part of page is visible.

Implementation of this features in whole project can be visible on our github account [here](#).